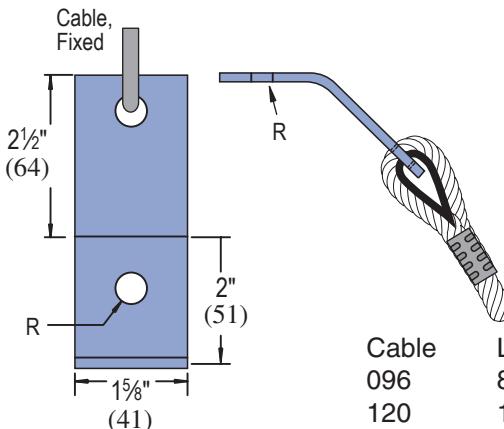
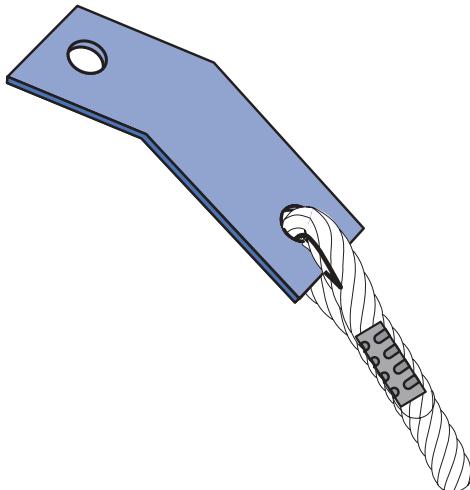


LS 500
SEISMIC PIVOT FITTINGS

**Example
LS500-037-096**

Cable Length
Anchor Size
Fitting Number

Cable	Length
096	8' (2.4M)
120	10' (3.0M)
144	12' (3.6M)
180	15' (4.5M)
240	20' (6.1M)
300	25' (7.6M)
360	30' (9.1M)
480	40' (12.2M)

Note:

1. Allowable loads have been determined by the manufacturers testing, analysis and technical specifications.
2. For retrofit application, engineer of record must verify.
3. Patented
4. Square washer provided with fitting.
5. Loads are the same as the SPF 400

FINISH
 Electro-galvanized (EG), conforming to
 ASTM B633 Type III SC1.

Part Number	Anchor Size In (mm)	"R" - Hole Diameter In (mm)
LS 500-037	3/8 10	7/16 11
LS 500-050	1/2 13	9/16 14
LS 500-062	5/8 16	11/16 18
LS 500-075	3/4 19	13/16 21

MATERIAL

Fittings, unless noted, are made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many fittings are also available in stainless steel, aluminum and fiberglass. Consult factory for ordering information.

FINISHES

Fittings are available in:

Perma-Green III (GR),

Electro-galvanized (EG), conforming to
 ASTM B633 Type III SC1;

Hot-dipped galvanized (HG), conforming to
 ASTM A123 or A153 and

Plain (PL).

Project: _____

Approval Stamp: _____

Architect / Engineer: _____

Date: _____ **Phone:** _____

Contractor: _____

Address: _____

Notes 1: _____

Notes 2: _____