



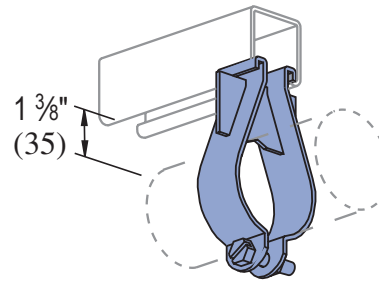

P1563 THRU P1573

PARALLEL CLAMPS FOR RIGID CONDUIT AND PIPE

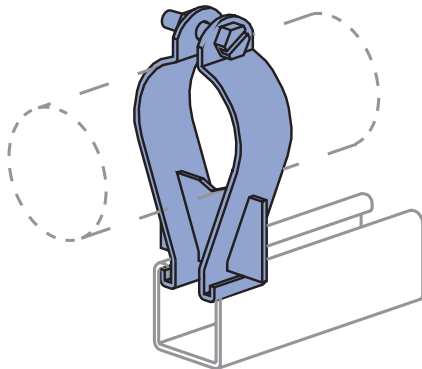

Slotted hex head screw and nut included.

Finish: Electro-galvanized.

Part No.	Pipe Size In (mm)	O.D. Size In (mm)	Thickness Gauge (mm)	Wt/100 pcs Lbs (kg)
P1563	3/8 10	0.675 17.1	14 1.9	27 12.2
P1564	1/2 13	0.840 21.3	14 1.9	29 13.2
P1565	3/4 19	1.050 26.7	14 1.9	30 13.6
P1566	1 25	1.315 33.4	14 1.9	31 14.1
P1567	1 1/4 32	1.660 42.2	14 1.9	38 17.2
P1568	1 1/2 38	1.900 48.3	12 2.7	40 18.1
P1569	2 51	2.375 60.3	12 2.7	47 21.3
P1570	2 1/2 64	2.875 73.0	12 2.7	66 29.9
P1571	3 76	3.500 88.9	12 2.7	78 35.4
P1572	3 1/2 89	4.000 101.6	12 2.7	87 39.5
P1573	4 102	4.500 114.3	12 2.7	90 40.8

MATERIAL

Unistrut pipe clamps, unless noted, are punch-press made from hot-rolled, pickled and oiled steel plates, strip or coil, and conform to ASTM specifications A1008, A575, A576, A635, or A36. The fitting steel also meets the physical requirements of ASTM A1011 SS GR 33. The pickling of the steel produces a smooth surface free from scale.

Many items are also available in stainless steel.

Consult factory for ordering information.

FINISHES

Pipe supports are available in:

- Electro-galvanized (EG), conforming to ASTM B633 Type III SC1
- Hot-dipped galvanized (HG), conforming to ASTM A123 or A153 (hardware)
- Perma-Green III (GR), and plain (PL).

Project: _____

Architect / Engineer: _____

Date: _____ Phone: _____

Contractor: _____

Address: _____

Notes 1: _____

Notes 2: _____

Approval Stamp: _____