





Food Grade Strut®

Sanitary mounting systems for food processing facilities

Are you still using traditional strut or fabricating custom brackets for sanitary pipe/conduit mounting applications?



Food Grade Strut® has the solution for your sanitary pipe/conduit mounting needs.

Wall Mount Strut®

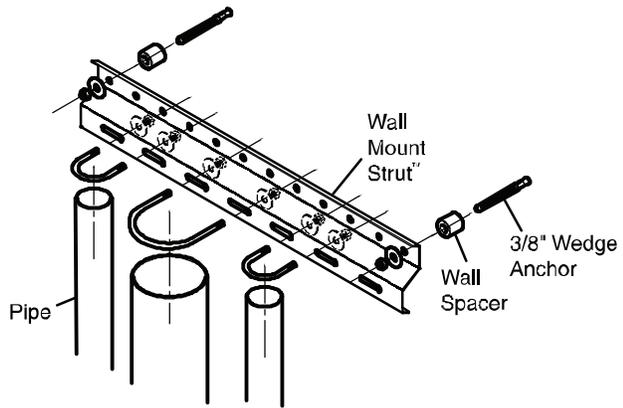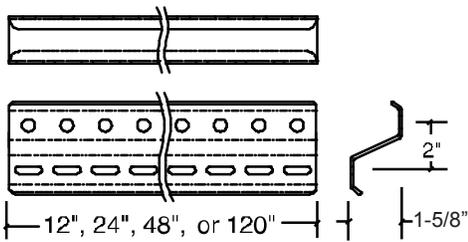

Wall Mount Strut® is made of heavy-duty 12 ga. 304/316 stainless steel and is available in precut lengths of: 12", 24" 48" and 120".

Trapeze Mount Strut®

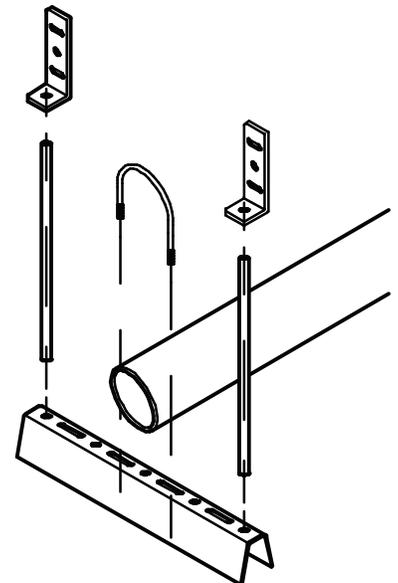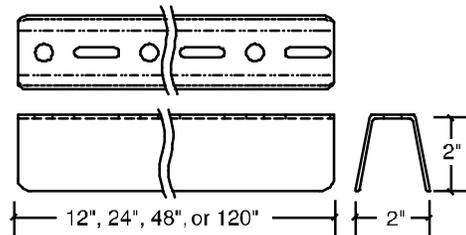

Trapeze Mount Strut® is made of heavy-duty 12 ga. 304/316 stainless steel and is available in precut lengths of: 12", 24" 48" and 120".

Food Grade Strut
4185 E. Jefferson Ave.
Fresno, CA 93725-9707
USA

Toll free: **(866) FG STRUT**
or (866) 347-8788
Phone: (559) 834-1219
Fax: (559) 834-1760


FoodGradeStrut.com

Patent #'s 7,651,056; 7,926,766; 7,931,242

Food Grade Strut® Accessories

PATENTED

U-Bolts:

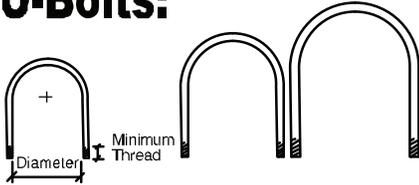

Food Grade Strut(R) U-bolts are fabricated to accommodate trade sizes of conduit and tubing. Each U-bolt has minimum thread to ease assembly and minimize exposed threads.

Please refer to the U-bolt Selection Chart.

All U-bolts are pre-lubricated with food grade anti-seize, and include necessary mounting hardware.

U-Bolt Selection Chart



	OD Tube	Schedule Pipe	Rigid Conduit	EMT	Ocal®	
Trade Size	1/2"	UB-10	UB-30	UB-30	UB-20	UB-40
	3/4"	UB-20	UB-40	UB-40	UB-40	UB-50
	1"	UB-40	UB-60	UB-60	UB-50	UB-70
	1-1/4"	UB-60	UB-80	UB-80	UB-70	UB-90
	1-1/2"	UB-70	UB-90	UB-90	UB-90	UB-100
	2"	UB-100	UB-110	UB-110	UB-110	UB-120
	2-1/2"	UB-120	UB-130	UB-130	UB-130	UB-140
	3"	UB-140	UB-150	UB-150	UB-150	UB-150
	3-1/2"	UB-150	UB-160	UB-160	UB-160	UB-160
	4"	UB-160	UB-170	UB-170	UB-170	UB-170
	Larger	Custom	Custom	Custom	Custom	Custom

Ocal® is a registered trademark of Thomas & Betts.

Wall Mount Strut® Accessories

Wall Spacers:

Wall spacers are made of solid 304/316 stainless steel and must be used between each piece of Wall Mount Strut™ and walls. Use TWO for 1' to 5' long strut pieces, use THREE for strut pieces longer than 5'.

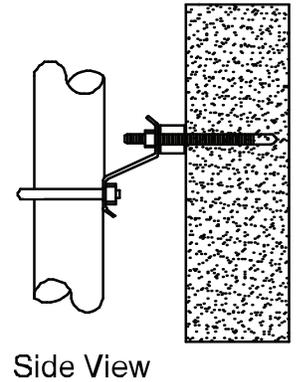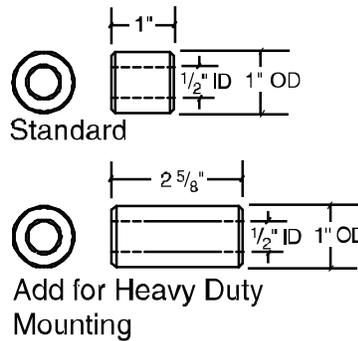


Trapeze Mount Strut® Accessories

L-Brackets:

L-Brackets are used for mounting Hanger Rods to the ceiling or other overhead structures. Made of 304/316 stainless steel.

Design load = 500 # force downward
Attach to supporting member using fasteners that provide a collective working shear strength of 1,500 lbs. or more.




Hanger Rods:

304/316 Stainless steel Hanger Rods are available in 1 meter (est. 39-3/8") long or 2 meters (est. 78-3/4") long. Each rod is internally threaded for sanitary design and ease of installation.

Working tension for Hanger Rods is 1,150#.

Attach Hanger Rod to L-Bracket and Strut with 3/8" NC x 1" 304 stainless steel bolts possessing a proof strength of 15,000 psi or more.

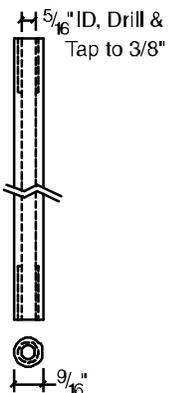

Food Grade Solutions
 2030 S. Golden State Blvd.
 #206 PO Box 69
 Fowler, CA 93625

Phone: (559) 834-1219
 Fax: (559) 834-1760

FoodGradeSolutions.com