
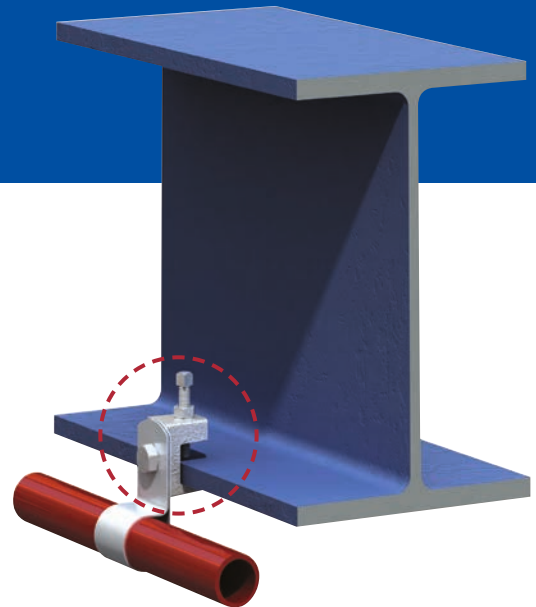


Type LC - LindiClip®

A flange clamp for parallel or tapered flanges with tapped holes to accept threaded rod or cable clips. Supplied with a high tensile cup point setscrew.

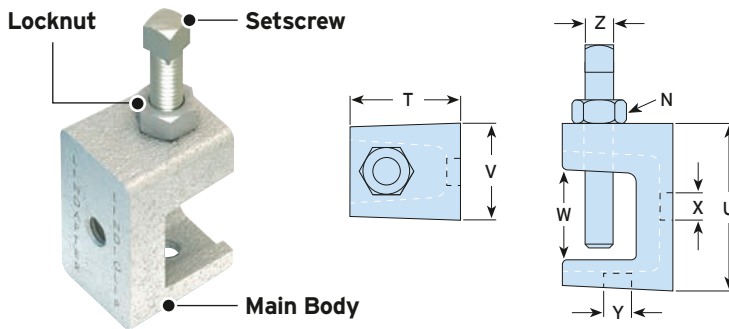



Material: Malleable iron, zinc plated.

➤ Installation is the same as Type FL (page 54).


Product Code	Thread		Safe Working Load (FOS 4:1)		Clamping Range W mm	Setscrew Z	Tightening Torque		Dimensions		
	X	Y	Tensile in Position X kN	Tensile in Position Y kN			Setscrew Z Nm	Locknut N Nm	T mm	U mm	Width V mm
LC06	M6	M6	0.18	0.59	3 - 20	M6	4	4	25	36	21
LC08	M8	M8	0.18	0.59	3 - 20	M6	4	4	25	36	21

Type SW

A swivel unit for applications on inclined beams complete with a M10 x 90mm (property class 8.8) setscrew and nut. Can be supplied with Type FL or Type Z10.

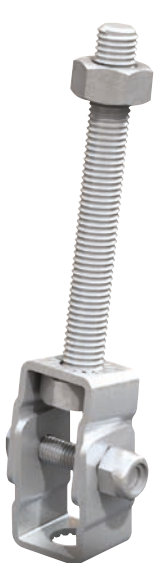

Material: High grade alloy steel, zinc plated.

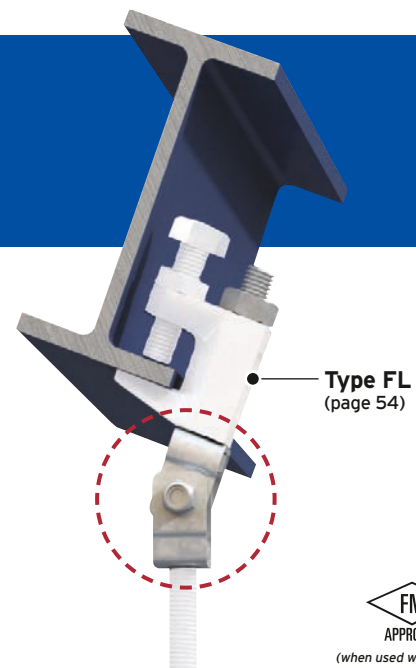

(when used with Type FL)

Product Code	Rod	Safe Working Load (FOS 4:1)	Maximum Inclination	Rotation	Tightening Torque Nm	Dimensions		
		Tensile kN				U mm	R mm	Width with Bolt V mm
SW10	M10	2.4	18°	360°	11	45	25	35