

DAKOTA SMART-CAPS™



Features & Benefits:


- **HUGE time savings!**
- Economical option for dual mounting top and bottom strut
- Optional receiver available for easy installation to strut*
- Usable with most standard strut
- Multiple lengths available (14", 24", 120")
- High grade material
- Clean and organized appearance
- Ready to use with all Dakota Clamps
- Double row capable at top of electrical panel with Dakota Smart-Strut
- Patent Pending
- Made in the USA



Specs

Material	ASTM A653 33,000 PSI min yield, grade 50
Finish	Pre-galvanized 90
Color	Grey
Applications	Multiple


Dimensions

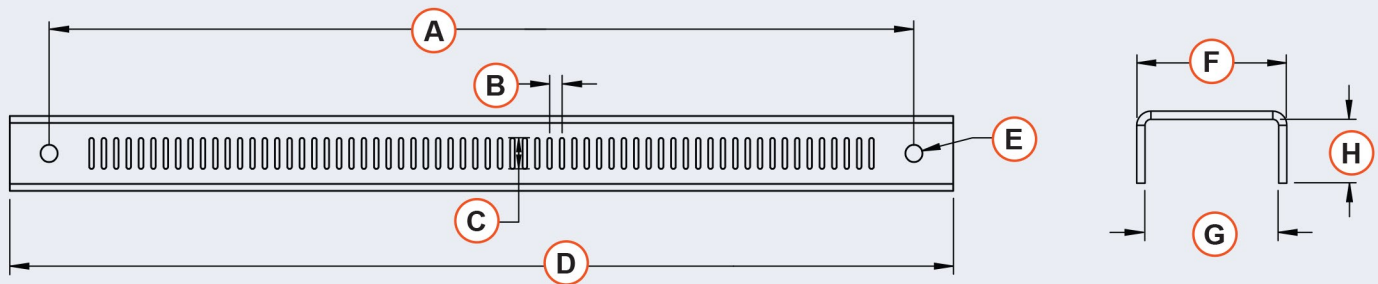

Part #	Description	Gauge	A Hole to Hole Center Distance	B Distance Between Slots	C Slot Length	D Overall Length	E Hole Diameter	F Overall Width	G Inside Width	H Inside Height
DS-CAP12-14-PG	14" Dakota Smart-Cap	12 ga.	22" Centers (55.8mm)	31.5" (8mm)	0.787" (20mm)	1' 2" (14")	13/32" (11.1mm)	1.91" (48.5mm)	1.7" (43.2mm)	13/16" (20.6mm)
DS-CAP12-14-PG	24" Dakota Smart-Cap					2' (24")				
DS-CAP12-120-PG	120" Dakota Smart-Cap					10' (120")				
DS-CAPTR12-14-PG	14" Dakota Smart-Cap with Threaded Receiver					1' 2" (14")				
DS-CAPTR12-24-PG	24" Dakota Smart-Cap with Threaded Receiver					2' (24")				

Assembly applications

Typical assembly of a double-sided Trapeze System

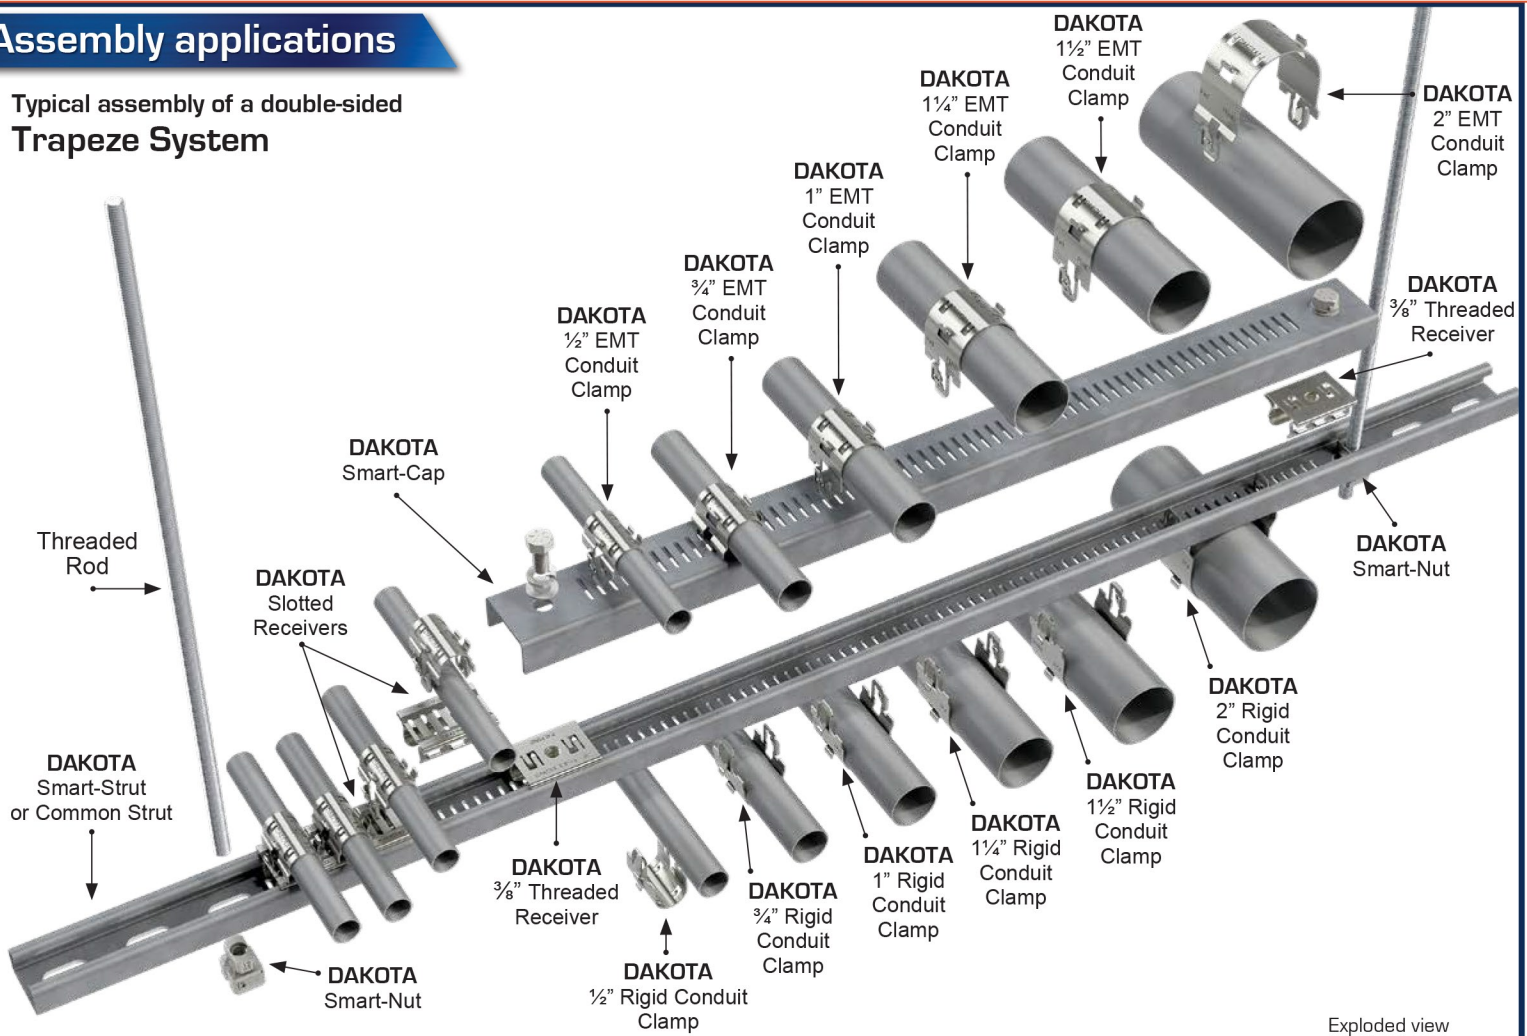


Visit WWW.DAKOTASYSTEMSUSA.COM for

- "How To" Videos
- Time Savings Comparison Information
- Industry Specific Applications
- Product Specifications
- New & Upcoming Products

DAKOTA product line



DAKOTA
Clamps

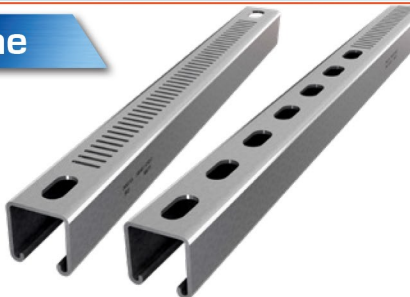

DAKOTA
Smart-Strut™



DAKOTA
Smart-Caps™ & Receivers



DAKOTA
Smart-Nut™

DAKOTA SYSTEMS

A division of **MAG DADDY**
MAGNETIC FASTENERS

UBS

Unistrut Buffalo Supports

128 Sycamore Street - Buffalo, NY 14204-1942

Toll-Free: (800) 285-3056 Tel: (716) 854-7633 Fax: (716) 854-1184

Web: unistrutstore.com

Email: sales@unistrutstore.com