


DAKOTA SMART-NUT™



Features & Benefits:


- **HUGE time savings!**
- Snap-on, Adjust, Insert, Turn, Locked
- Quickly installed and removed
- High strength yield
- No de-burring of threaded rods required
- No threading required
- Simplifies multiple level trapeze installation
- Multiple applications for threading fixtures to strut
- Easily prefabricated
- Patent Pending
- Made in USA

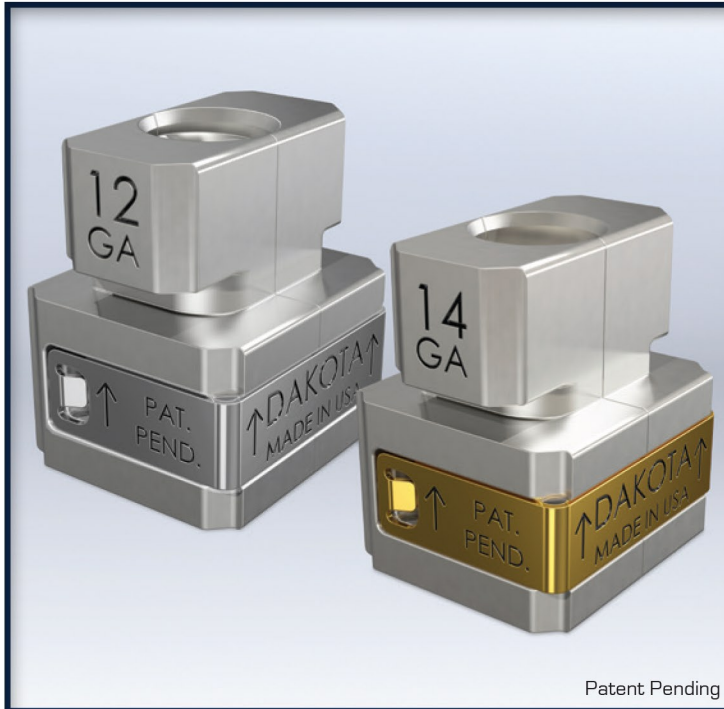



Specs

Material	Iron, Spring steel band
Finish	Zinc Electroplate Trivalent
Color	12 Gauge Silver 14 Gauge Gold
Applications	Attaching threaded rod and/or fixtures to slotted strut

Installation

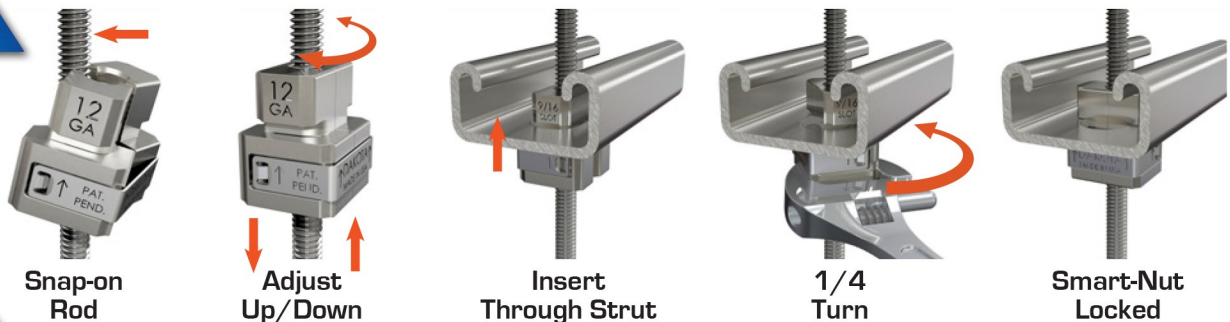


Dimensions

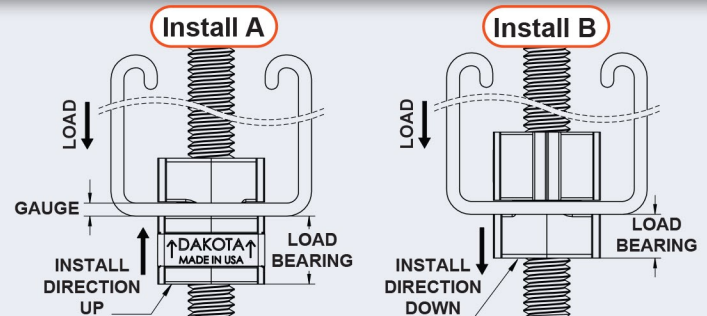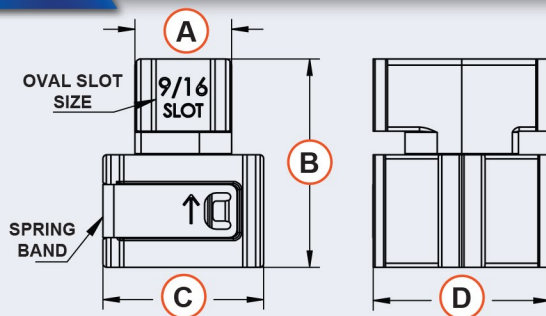

Part #	Gauge	Thread	Spring Band	A Head Width	B Height	C Width	D Length	Install A Max Recommended Load	Install B Max Recommended Load
DS-NUT14-14-EG	14	1/4-20	Gold	12 mm (0.472 in)	25.92 mm (1.020 in)	20.0 mm (0.787 in)	22.0 mm (0.866 in)	800 lbs	600 lbs
DS-NUT14-38-EG		3/8-16							
DS-NUT12-14-EG	12	1/4-20	Silver	12 mm (0.472 in)	25.92 mm (1.020 in)	20.0 mm (0.787 in)	22.0 mm (0.866 in)	800 lbs	600 lbs
DS-NUT12-38-EG		3/8-16							

Assembly applications

Typical assembly of a double-sided Trapeze System

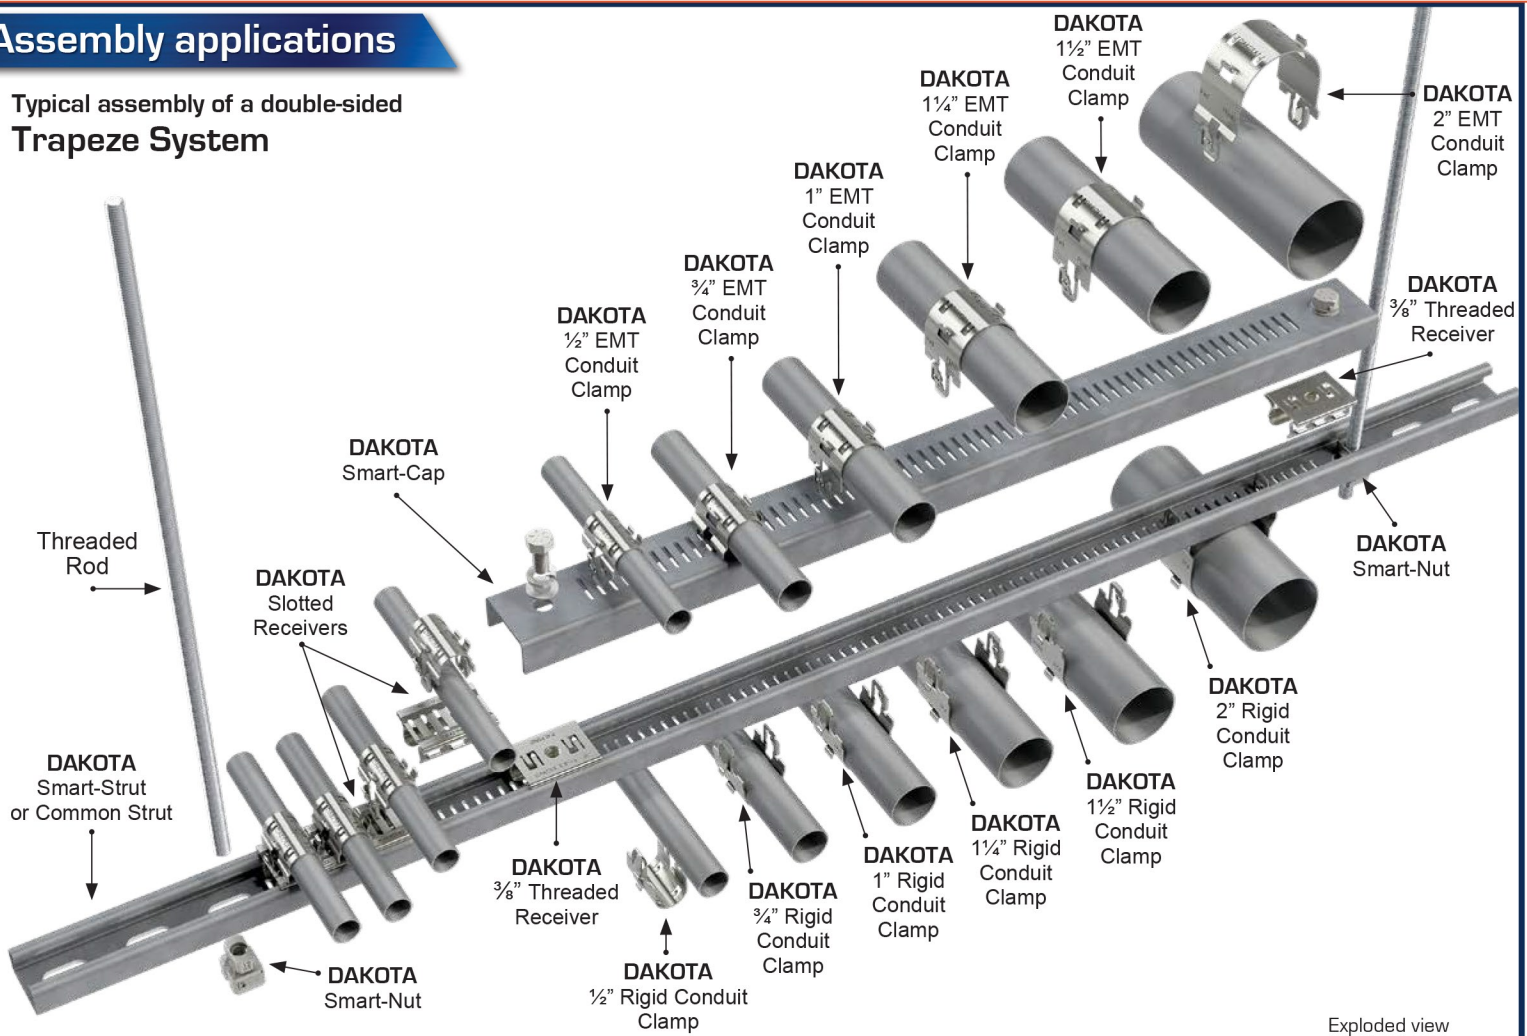

Visit WWW.DAKOTASYSTEMSUSA.COM for

- "How To" Videos
- Time Savings Comparison Information
- Industry Specific Applications
- Product Specifications
- New & Upcoming Products

DAKOTA product line



DAKOTA
Clamps



DAKOTA
Smart-Strut™



DAKOTA
Smart-Caps™ & Receivers



DAKOTA
Smart-Nut™

DAKOTA SYSTEMS

A division of **MAG DADDY**
MAGNETIC FASTENERS

UBS

Unistrut Buffalo Supports

128 Sycamore Street - Buffalo, NY 14204-1942

Toll-Free: (800) 285-3056 Tel: (716) 854-7633 Fax: (716) 854-1184

Web: unistrutstore.com

Email: sales@unistrutstore.com